

V100-17-CAN,V100-S-CAN CANbus Module

This guide provides specifications for Unitronics' communication module V100-17-CAN, V100-S-CAN. You can find additional information, such as wiring diagrams, in the product's installation guide located on the Unitronics' Setup CD and in the Technical Library at www.unitronics.com.

V100-17-CAN,V100-S-CAN


Use this CANbus module to create a decentralized control network using CAN protocols:

- CANopen: 127 controllers or external devices
- Unitronics' proprietary UniCAN: 60 controllers, (512 data bytes per scan)

The CANbus port is galvanically isolated.

Standard Kit contents

- V100-17-CAN ,V100-S-CAN
- 5-pin CANbus connector
- Termination resistor

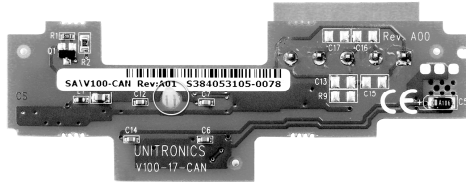

V100-17-CAN, V100-S-CAN Technical Specifications

CANbus port	1	
Nodes	CANopen	Unitronics' CANbus protocols
	127	60
Power requirements	24VDC ($\pm 4\%$), 40mA max. per unit	
Galvanic isolation	Yes, between CANbus and controller	
Cable type	Twisted-pair; DeviceNet® thick shielded twisted pair cable is recommended.	
Cable length/baud rate	25 m	1 Mbit/s
	100 m	500 Kbit/s
	250 m	250 Kbit/s
	500 m	125 Kbit/s
	500 m	100 Kbit/s
	1000 m*	50 Kbit/s
	1000 m*	20 Kbit/s
Weight	9.2g (0.32 oz)	

Environment

Relative Humidity (RH)	10% to 95% (non-condensing)	
Operational temperature	<u>V100-17-CAN</u>	<u>V100-S-CAN</u>
	0 to 50°C (32 to 122°F)	-30 to 60°C (-22 to 140°F)
	Storage temperature	-20 to 60°C (-4 to 140°F)

v100-17-can-v100-s-can_en_1215

KLINKMANN

www.klinkmann.ru

Санкт-Петербург

тел. +7 812 327 3752
klinkmann@klinkmann.spb.ru

Москва

тел. +7 495 641 1616
moscow@klinkmann.spb.ru

Екатеринбург

тел. +7 343 287 19 19
yekaterinburg@klinkmann.spb.ru

Самара

тел. +7 846 273 95 85
samara@klinkmann.spb.ru

Київ

тел. +38 044 495 33 40
klinkmann@klinkmann.kiev.ua

Минск

тел. +375 17 2000 876
minsk@klinkmann.com

Хelsinki

puh. +358 9 540 4940
automation@klinkmann.fi

Rīga

tel. +371 6738 1617
klinkmann@klinkmann.lv

Vilnius

tel. +370 5 215 1646
post@klinkmann.lt

Tallinn

tel. +372 668 4500
klinkmann.est@klinkmann.ee